# General Specifications

EJX210A
Flange Mounted
Differential Pressure Transmitter



[Style: S2]

GS 01C25C01-01EN

The high performance flange mounted differential pressure transmitter EJX210A can be used to measure levels of densities of solidifying or precipitating liquids. EJX210A outputs a 4 to 20 mA DC signal corresponding to the measured differential pressure.

Its highly accurate and stable sensor can also measure the static pressure which can be shown on the integral indicator or remotely monitored via BRAIN or HART communications. Other key features include quick response, remote set-up using communications, and diagnostics and optional status output for pressure high/low alarm. The multi-sensing technology provides the advanced diagnostic function to detect such abnormality as an impulse line blockage.

FOUNDATION Fieldbus and PROFIBUS PA protocol types are also available. All EJX series models in their standard configuration, with the exception of the Fieldbus and PROFIBUS types, are certified by TÜV as complying with SIL 2 for safety requirement.



Refer to GS 01C25T02-01EN for Fieldbus communication type and GS 01C25T04-01EN for PROFIBUS PA communication type for the items marked with "\0."

#### □ SPAN AND RANGE LIMITS

Measurement Span/Range		kPa	inH2O (/D1)	mbar (/D3)	mmH2O (/D4)
N 4	Span	Span 1 to 100		10 to 1000	100 to 10000
M	Range	-100 to 100	-400 to 400	-1000 to 1000	-10000 to 10000
L	Span	5 to 500	20 to 2000	50 to 5000	0.05 to 5 kgf/cm <sup>2</sup>
Н	Range	-500 to 500	-2000 to 2000	-5000 to 5000	-5 to 5 kgf/cm <sup>2</sup>

#### PERFORMANCE SPECIFICATIONS

Zero-based calibrated span, linear output, wetted parts material code SW for 3-inch flange flush type, and fill fluid code B.

For Fieldbus and PROFIBUS PA communication types, use caribrated range instead of span in the following specifications.

#### **Specification Conformance**

EJX series ensures specification conformance to at least  $\pm 3\sigma$ .

#### Reference Accuracy of Calibrated Span

(includes terminal-based linearity, hysteresis, and repeatability)



Measurem	ent span	Н		
Reference	X≤span	±0.075% of Span		
accuracy	X > span	±(0.025+0.01 URL/span)% of Span		
X		100 kPa (400 inH2O)		
URL (upper range limit)		500 kPa (2000 inH2O)		

Measurem	ent span	M	
Reference X≤span		±0.075% of Span	
accuracy	X > span	±(0.025+0.005 URL/span)% of Span	
X		10 kPa (40 inH2O)	
URL (upper range limit)		100 kPa (400 inH2O)	

## Ambient Temperature Effects per 28°C (50°F) Change

Capsule	Effect
М	±(0.14% Span+0.028% URL)
Н	±(0.224% Span+0.056% URL)

#### Static Pressure Effects per 0.69 MPa (100 psi) Change

#### Span Effects

M and H capsules ±0.028% of span

#### Effect on Zero

M and H capsules ±0.007% of URL

## Stability

±0.1 % of URL per 12 months

## Power Supply Effects(Output signal code D, E and J)

 $\pm 0.005$  % per Volt (from 21.6 to 32 V DC, 350 $\Omega$ )



#### Response Time (Differential pressure) "◊"

M and H capsule: 120 ms (approximate value at normal temperature)

When software damping is set to zero and including dead time of 45 ms (nominal)

#### Static Pressure Signal Range and Accuracy (For monitoring via communication or on indicator for BRAIN and HART communication type. Includes terminal-based linearity, hysteresis, and repeatability)

#### Range

Upper Range Value and Lower Range Value of the static pressure can be set in the range between 0 and Maximum Working Pressure (MWP\*). The upper range value must be greater than the lower range value. Minimum setting span is 0.5 MPa (73 psi).

\*: Maximum Working Pressure (MWP) is within flange rating pressure.

## **Accuracy**

Absolute Pressure

1 MPa or higher: ±0.2% of span

Less than 1 MPa: ±0.2%×(1 MPa/span) of span

Gauge Pressure Reference

Gauge pressure reference is 1013 hPa (1 atm)

Note: Gauge pressure variable is based on the above fixed reference and thus subject to be affected by the change of atomospheric pressure.

#### FUNCTIONAL SPECIFICATIONS

## Output "◊"

Two wire 4 to 20 mA DC output with digital communications.

BRAIN or HART FSK protocol are superimposed on the 4 to 20 mA signal.

Output range: 3.6 mA to 21.6 mA

Output limits conform to NAMUR NE43 can be preset by option code C2 or C3.

## Failure Alarm (Output signal code D, E and J)

Output status at CPU failure and hardware error; Up-scale: 110%, 21.6 mA DC or more (standard) Down-scale: -5%, 3.2 mA DC or less

Analog output status at process abnormality (Option code /DG6);

The result of process abnormality detected by the advanced diagnostic function can be reflected to an analog alert status. The following three setting modes are available.

			Mode			
		Burnout	Fall back	Off		
Standard		110%, 21.6mA or more	Holds to a			
	/C1	-2.5%, 3.6mA or less	specified value within the	Niaman I accident		
Option Code	/C2	-1.25%, 3.8mA or less	output range from 3.6mA to	Normal output		
	/C3 103.1%, 20.5mA or more		21.6mA			

#### Damping Time Constant (1st order)

Amplifier damping time constant is adjustable from 0.00 to 100.00 s by software and added to response time

Note: For BRAIN protocol type, when amplifier software damping is set to less than 0.5 s, communication may occasionally be unavailble during the operation, especially while output changes dynamically. The default setting of damping ensures stable communication.

#### Update Period "◊"

Differential pressure: 45 ms Static pressure: 360 ms

#### **Zero Adjustment Limits**

Zero can be fully elevated or suppressed, within the lower and upper range limits of the capsule.

#### **External Zero Adjustment**

External zero is continuously adjustable with 0.01% incremental resolution of span. Re-range can be done locally using the digital indicator with rangesetting switch.

## Integral Indicator (LCD display, optional) "\"

5-digit numerical display, 6-digit unit display and bar graph.

The indicator is configurable to display one or up to four of the following variables periodically.; Measured differential pressure, differential pressure in %, scaled differential pressure, measured static pressure. See also "Factory Setting."

#### **Self Diagnostics**

CPU failure, hardware failure, configuration error, process alarm for differential pressure, static pressure or capsule temperature.

User-configurable process high/low alarm for differential pressure and static pressure is also available, and its status can be output when optional status output is specified.

## Advanced Diagnostics (optional) "\0"

Applicable for Output signal code E, J and F.

Impulse line blockage detection
 The impulse line condition can be calculated and detected by extracting the fluctuation component from differential pressure and static pressure signals.

## Signal Characterizer (Output signal code D, E and J)

User-configurable 10-segment signal characterizer for 4 to 20 mA output.

## Status Output (optional, output signal code D, E and J)

One transistor contact output (sink type) to output the status of user configurable high/low alarm for differential pressure/static pressure.

Contact rating: 10.5 to 30 V DC, 120 mA DC max. Refer to 'Terminal Configuration' and 'Wiring Example for Analog Output and Status Output.'

#### **SIL Certification**

EJX series transmitters except Fieldbus and PROFIBUS PA communication type are certified by TÜV in compliance with the following standards; IEC 61508: 2000; Part1 to Part 7 Functional Safety of Electrical/electronic/programmable electronic related systems; SIL 2 capability for single transmitter use, SIL 3 capability for dual transmitter use.

## NORMAL OPERATING CONDITION (Optional features or approval codes may affect limits.)

#### **Ambient Temperature Limits**

-40 to 85°C (-40 to 185°F)

-30 to 80°C (-22 to 176°F) with LCD display (Note: The ambient temperature limits must be within the fill fluid operating temperature range, see table 1.)

#### **Process Temperature Limits**

High pressure side: See table 1. Low pressure side: -40 to 120°C (-40 to 248°F)

## **Ambient Humidity Limits**

0 to 100% RH

#### **Working Pressure Limits**

See table 1.

For atmospheric pressure or below, see figure 1.

#### Supply & Load Requirements

(Output signal code D, E and J. Optional features or approval codes may affect electrical requirements.)

With 24 V DC supply, up to a  $550\Omega$  load can be used. See figure 2.

## Supply Voltage "\"

10.5 to 42 V DC for general use and flameproof type. 10.5 to 32 V DC for lightning protector (option code /A.)

10.5 to 30 V DC for intrinsically safe, type n, or nonincendive.

Minimum voltage limited at 16.6 V DC for digital communications, BRAIN and HART

#### Load (Output signal code D, E and J)

0 to  $1290\Omega$  for operation

250 to  $600\Omega$  for digital communication

#### Communication Requirements "\"

(Approval codes may affect electrical requirements.)

#### **Communication Distance**

Up to 2 km (1.25 miles) when using CEV polyethylene-insulated PVC-sheathed cables. Communication distance varies depending on type of cable used.

#### **Load Capacitance**

0.22 µF or less

## Load Inductance

3.3 mH or less

#### Input Impedance of communicating device 10 k $\Omega$ or more at 2.4 kHz.

## EMC Conformity Standards C€ , € N200

EN61326-1 Class A, Table2 (For use in industrial locations)

EN61326-2-3

EN61326-2-5 (for PROFIBUS only)

## **European Pressure Equipment Directive 97/23/EC**

Sound Engineering Practice

#### Safety Requirement Standards

EN61010-1

- Altitude of installation site: Max. 2,000 m above sea level
- Installation category: I
- Pollution degree: 2
- Indoor/Outdoor use

Table 1. Process temperature, Ambient temperature, and Working pressure

	Code	Process temperature*1*2	Ambient temperature*3	Working pressure
Silicone oil (high temperature use)	Α	-10 to 250°C *4 (14 to 482°F)	–10 to 85°C (14 to 185°F)	2.7 kPa abs (0.38 psi abs)
Silicone oil (general use)	В	-40 to 120°C (-40 to 248°F)	–40 to 85°C (–40 to 185°F)	to flange rating pressure
Fluorinated oil (Oil-prohibited use)	D	–20 to 120°C *5 (–4 to 185°F)	–20 to 80°C (–4 to 176°F)	51 kPa abs (7.4 psi abs) to flange rating pressure
Plopylene glycol	Р	–10 to 120°C (–14 to 248°F)	–10 to 85°C (14 to 185°F)	100 kPa abs (atmospheric pressure) to flange rating pressure

- See figure 1 'Working Pressure and Process Temperature.'
- \*2: Indicates high pressure side value. The process temperature limit for low pressure side is -40 to 120°C (-40 to 248°F).
- \*3: This ambient temperature is the transmitter ambient temperature.
- \*4: In case of wetted parts material code TW (Tantalum), process temperature limit is up to 200°C (392°F).
- The process temperature limit for lower pressure side is -20 to 80°C (-4 to 176°F.)

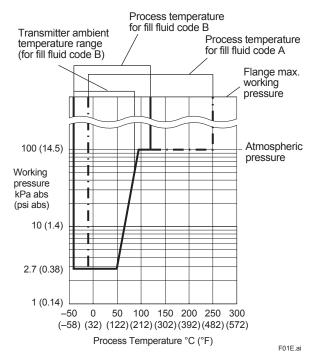


Figure 1. Working Pressure and Process
Temperature (Fill fluid: silicone oil for
general and high temperature use)

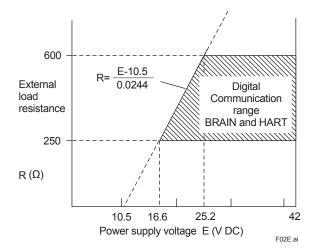


Figure 2. Relationship Between Power Supply Voltage and External Load Resistance

#### PHYSICAL SPECIFICATIONS

#### **Process connections**

#### High pressure side:

Flange connected See the following table.

Table 2. Flange size and rating

Process connection style	Size	Flange	
Flush type	3-inch 2-inch 11/2-inch*	JIS 10K, 20K ANSI Class 150, 300 JPI Class 150, 300 DIN PN10/16, 25/40	
Extended type	4-inch 3-inch	JIS 10K, 20K ANSI Class 150, 300 JPI Class 150, 300 DIN PN10/16, 25/40	

<sup>\*:</sup> Flushing connection rings are always attached.

#### Low pressure side:

Threaded

See "MODEL AND SUFFIX CODES."

Process connection of cover flange: IEC61518

## **Gasket Contact Surface**

See the following table.

Table 3. Gasket contact surface

Fl	ange	JIS/JF	PI/DIN	ANSI	
Wetted parts ma	SW, SE, WW, WE	HW, TW	SW, SE, WW, WE	HW, TW	
Gasket contact	Serration*1	_	_	•	_
Surface	Flat (No serration)	•	•	•	•

• : Applicable

-: Not applicable

\*1: ANSI B16.5

## **Electrical Connections**

See "MODEL AND SUFFIX CODES."

#### **Wetted Parts Materials**

## High pressure side:

Refer to "MODEL AND SUFFIX CODES"

Flushing connection ring (optional)

## Ring and Vent/Drain plugs

Refer to "MODEL AND SUFFIX CODES"

(Spiral) gasket for transmitter side

316L SST (Hoop), PTFE Teflon (Filler)

#### Low pressure side:

Diaphragm, Cover Flange, Process Connector, Capsule Gasket, and Vent/Drain plug Refer to "MODEL AND SUFFIX CODES"

Process connector gasket

PTFE Teflon

#### **Non-wetted Parts Materials**

#### **Process Flange**

Refer to "MODEL AND SUFFIX CODES"

#### Bolting

B7 carbon steel, 316L SST or 660 SST

#### Housing

Low copper cast aluminum alloy with polyurethane, mint-green paint (Munsell 5.6BG 3.3/2.9 or its equivalent) or ASTM CF-8M stainless steel

#### **Degrees of Protection**

IP66/IP67, NEMA TYPE 4X

#### **Cover O-rings**

Buna-N, fluoro-rubber (optional)

#### Name plate and tag

316 SST

#### Fill Fluid

Silicone oil, Plopylene glycol, Fluorinated oil (optional)

#### Weight

## Flush type

(3-inch ANSI Class150 flange; without integral indicator, and process connector.)
General use (fill fluid code B or P): 8.3 kg (18.3 lbs)
High temperature use (fill fluid code A):
9.0 kg (19.8 lbs)

## Extended type

(4-inch ANSI Class150 flange, extension length (X<sub>2</sub>) = 100 mm; without integral indicator, and process connector.)

General use (fill fluid code B or P): 12.8 kg (28.2 lbs) High temperature use (fill fluid code A): 13.5 kg (29.8 lbs)

Add 1.5kg (3.3lb) for Amplifier housing code 2.

## < Related Instruments> "◊"

Power Distributor: Refer to GS 01B04T01-02E or GS 01B04T02-02E

BRAIN TERMINAL: Refer to GS 01C00A11-00E


#### < Reference >

- 1. DPharp EJX, FieldMate; Trademarks of Yokogawa Electric Corporation.
- Teflon; Trademark of E.I. DuPont de Nemours & Co.
- 3. Hastelloy; Trademark of Haynes International Inc.
- 4. HART; Trademark of the HART Communication Foundation.
- 5. FOUNDATION Fieldbus; Tradmark of Fieldbus Foundation.
- PROFIBUS; Registered trademark of Profibus Nutzerorganisation e.v., Karlsruhe, Germany.
   Other company names and product names used in this material are registered trademarks or trademarks of their respective owners.

## ■ MODEL AND SUFFIX CODES

#### Instruction

The model and suffix codes for EJX210A consist of two parts; a transmitter body section (I) and a flange mounting section (II). This specification sheet introduces these two parts separately. The transmitter body section is shown in one table, and the flange mounting section specifications are listed according to the flange size and the process connection style. First select the model and suffix codes of transmitter body section and then continue on one of the flange mounting section.

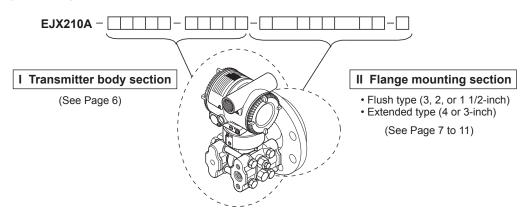

F03E.ai

#### I. Transmitter body section





F04 1E.a

Model	Suffix Codes	Description
EJX210A		. Flange mounted differential pressure transmitter
Output signal	-D -E -J -F	<ul> <li>4 to 20 mA DC with digital communication (HART 5 protocol)</li> <li>4 to 20 mA DC with digital communication (HART 5 / HART 7 protocol)         (Refer to GS 01C25T01-01EN)</li> <li>Digital communication (FOUNDATION Fieldbus protocol, refer to GS 01C25T02-01EN)</li> </ul>
Measurement span (capsule)	M	
Low pressure sid wetted parts mate		. Refer to "Low Pressure Side Wetted Parts Materials" Table below.
Low pressure side Process connections  0		<ul> <li>with Rc 1/4 female process connector</li> <li>with Rc 1/2 female process connector</li> <li>with 1/4 NPT female process connector</li> <li>with 1/2 NPT female process connector</li> </ul>
Coverflange bolts and nuts material J		B7 carbon steel 316L SST 660 SST
Installation	-9	. Horizontal piping type and left side high pressure
Amplifier housing	1 3 2	Cast aluminum alloy with corrosion resistance properties*1
Electrical connection    0		<ul> <li>1/2 NPT female, two electrical connections without blind plugs</li> <li>M20 female, two electrical connections without blind plugs</li> <li>G 1/2 female, two electrical connections with a blind plug *3</li> <li>1/2 NPT female, two electrical connections with a blind plug *3</li> <li>M20 female, two electrical connections with a blind plug *3</li> <li>G1/2 female, two electrical connections and a 316 SST blind plug</li> <li>1/2 NPT female, two electrical connections and a 316 SST blind plug</li> </ul>
E		Digital indicator*4 Digital indicator with the range setting switch*5
_	N	
Flange mounting	section	- Continued on flange mounting section (II)

The "▶" marks indicate the most typical selection for each specification.

- \*1: Not applicable for electrical connection code 0, 5, 7, 9 and A. Content rate of copper in the material is 0.03% or less and content rate of iron is 0.15% or less.
- \*2: Not applicable for electrical connections code 0, 5, 7 and 9.
- \*3: Material of a blind plug is aluminum alloy or 304 SST.
- \*4 Not applicable for output signal code G.
- \*5: Not applicable for output signal code F.

#### Table. Low Pressure Side Wetted Parts Materials

Low pressure side wetted parts material code Cover flange and process connector		Capsule	Capsule gasket	Drain/Vent plug
S#	ASTM CF-8M *1	Hastelloy C-276 *2 (Diaphragm) F316L SST (Others)	Teflon-coated 316L SST	316 SST

<sup>\*1:</sup> Cast version of 316 SST. Equivalent to SCS14A.


The '#marks indicate the construction materials conform to NACE material recommendations per MR0175 (2003). Please refer to latest standards for details.

<sup>\*2:</sup> Hastelloy C-276 or ASTM N10276

## II. Flange mounting section (Flush type)

• Process flange size: 3-inch (80mm)






Model	Suffix codes			Description			
EJX210A				Transmitter body se	ection (I)		
Process co	Process connection style -W			Flush type			
Flange ration		J1 J2 A1 A2 P1 P2 D2			JIS 10K JIS 20K ANSI class 150 ANSI class 300 JPI class 150 JPI class 300 DIN PN10/16 DIN PN25/40		
Flange size	;	3.			3-inch (80mm)		
Flange mat	rerial	▶	A B C		JIS S25C 304 SST *10 316 SST *10		
Gasket cor	itact surface*1		1		Serration (for ANSI flat (no serration)	flange with wetted parts mat	erial SW only)
	etted parts material gh pressure side) *9 SW			[Diaphragm] 316L SST# Hastelloy C-276 *7# Tantalum *8	[Others] 316 SST# Hastelloy C-276 * <sup>7‡</sup> Tantalum * <sup>8</sup>	<i>‡</i>	
Flushing co	onnection ring*2		Α.		[Ring] None Straight type Straight type	[Drain/Vent plugs]  R 1/4 connections *6 1/4 NPT connections	[Material] — 316 SST # 316 SST #
Extension			- (	0	None		
Fill fluid			•	-A -B -D -P	For high temperatur For general use (Sil For oil prohibited us For sanitary use (Pr	icone oil) —40 to 1 e (Fluorinated oil)*11–20 to 1	ature]*3 temperature] 250°C*4*5 –10 to 85°C 20°C –40 to 85°C 20°C –20 to 80°C
Option cod	Option codes				/□ Optional specific	cation	

The "▶" marks indicate the most typical selection for each specification.

Example: EJX210A-DMS5G-912NN-WA13B1SW00-B/□

- \*1: See Table 3 'Gasket contact surface' on Page 4.
- \*2: When specified flushing connection ring code A or B, exclusive gasket is provided for transmitter side.
  \*3: Indicates the process temperature limit of high pressure side.
- The process temperature limit for low pressure side is –40 to 120°C.
- \*4: The distance 'S' is extended in 30mm.
- \*5: In case of wetted parts material code TW (Tantalum), the process temperature limit is –10 to 200°C.
- \*6: Not applicable for gasket contact surface code 1.
- \*7: Hastelloy C-276 or ASTM N10276
- \*8: Not applicable for flashing connection ring code A and B.
- \*9: \( \Delta \) Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the diaphragm itself can be damaged and that material from the broken diaphragm and the fill fluid can contaminate the user's process fluids.
  - Be very careful with highly corrosive process fluids such as hydrochloric acid, sulfuric acid, hydrogen sulfide, sodium hypochlorite, and high-temperature steam (150°C [302°F] or above). Contact Yokogawa for detailed information of the wetted parts material.
- \*10: Forged version of the material may be used.
- \*11: Specify always with option code /K2 or /K6.


The "marks indicate the construction materials conform to NACE material recommendations per MR0175 (2003). Please refer to latest standards for details.



## II. Flange mounting section (Flush type)

• Process flange size: 2-inch (50mm)





Model	Suffix co	des				Description	
EJX210A	\  - <del></del>			Transmitter body se	ection (I)		
Process co	Process connection style -W			Flush type			
Flange ratii	ng	J1			JIS 10K JIS 20K ANSI class 150 ANSI class 300 JPI class 150 JPI class 300 DIN PN10/16 DIN PN25/40		
Flange size	;	2			2-inch (50mm)		
Flange ma	terial	A ▶ B			JIS S25C 304 SST *10 316 SST *10		
Gasket cor	ntact surface*1				Serration (for ANSI flat (no serration)	flange with wetted parts ma	terial WW only)
Wetted par (high press			WW		[Diaphragm] Hastelloy C-276 *7# Hastelloy C-276 *7# Tantalum *8	[Others] 316 SST# Hastelloy C-276 * <sup>7</sup> Tantalum * <sup>8</sup>	#
Flushing co	onnection ring* <sup>2</sup>	ı	Α		[Ring] None Straight type Straight type	[Drain/Vent plugs]  R 1/4 connections *6 1/4 NPT connections	[Material] — 316 SST # 316 SST #
Extension			0		None		
Fill fluid			•	-A -B -D -P	For sanitary use (Pr	re use (Silicone oil) -10 to icone oil) -40 to e (Fluorinated oil)*11-20 to opylene glycol) -10 to	ature] <sup>+3</sup> temperature] 250°C <sup>+4+5</sup> –10 to 85°C 120°C –40 to 85°C 120°C –20 to 80°C
Option cod	Option codes				/□ Optional specific	cation	

The "▶" marks indicate the most typical selection for each specification.

Example: EJX210A-DMS5G-912NN-WA12B1WW00-B/


- \*1: See Table 3 'Gasket contact surface' on Page 4.
- \*2: When specified flushing connection ring code A or B, exclusive gasket is provided for transmitter side.
  \*3: Indicates the process temperature limit of high pressure side.
- \*3: Indicates the process temperature limit of high pressure side.

  The process temperature limit for low pressure side is –40 to 120°C.
- \*4: The distance 'S' is extended in 30mm.
- \*5: In case of wetted parts material code TW (Tantalum), the process temperature limit is –10 to 200°C.
- \*6: Not applicable for gasket contact surface code 1.
- \*7: Hastelloy C-276 or ASTM N10276
- \*8: Not applicable for flashing connection ring code A and B.
- \*9: \( \Delta \) Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the diaphragm itself can be damaged and that material from the broken diaphragm and the fill fluid can contaminate the user's process fluids.

Be very careful with highly corrosive process fluids such as hydrochloric acid, sulfuric acid, hydrogen sulfide, sodium hypochlorite, and high-temperature steam (150°C [302°F] or above). Contact Yokogawa for detailed information of the wetted parts material.


- \*10: Forged version of the material may be used.
- \*11: Specify always with option code /K2 or /K6.


The "marks indicate the construction materials conform to NACE material recommendations per MR0175 (2003). Please refer to latest standards for details.



## II. Flange mounting section (Flush type)

• Process flange size: 1 1/2-inch (40mm)





Model	Suffix	codes			Description	on	
EJX210A				Transmitter body se	ction (I)		
Process co	nnection style	-W		Flush type			
Flange ration		J2 A1 A2 P1		JIS 10K JIS 20K ANSI class 150 ANSI class 300 JPI class 150 JPI class 300			
Flange size	<del></del>	8		1 1/2-inch (40mm)			
Flange mat	terial	► A B		JIS S25C 304 SST *8 316 SST *8			
Gasket cor	tact surface*1			Serration (for ANSI the Flat (no serration)	flange only)		
Wetted par (high press	ts material sure side) * <sup>7</sup>		ww	[Diaphragm] Hastelloy C-276 *6#	[Others] 316 SST#		
Flushing co	onnection ring*2	•	C	[Ring] Reducer type Reducer type	[Drain/Vent plugs] R 1/4 connections 1/4 NPT connection		SST <sup>#</sup>
Extension			0	None			
Fill fluid			-A -B -D -P	For high temperatur For general use (Sili For oil prohibited us For sanitary use (Pr	icone oil) e (Fluorinated oil)* <sup>9</sup>	[Process temperature]*3 -10 to 250°C*4 -40 to 120°C -20 to 120°C -10 to 120°C	[Ambient temperature] -10 to 85°C -40 to 85°C -20 to 80°C -10 to 85°C
Option cod	es			/□ Optional specific	cation		

The "▶" marks indicate the most typical selection for each specification.


Example: EJX210A-DMS5G-912NN-WA18B1WWC0-B/

- See Table 3 'Gasket contact surface' on Page 4.
- \*2: \*3: When specified flushing connection ring code C or D, exclusive gasket is provided for transmitter side.
- Indicates the process temperature limit of high pressure side. The process temperature limit for low pressure side is –40 to 120°C.
- \*4: The distance 'S' is extended in 30mm.
- \*5: Not applicable for gasket contact surface code 1.
- Hastelloy C-276 or ASTM N10276 \*6:
- \*7: A Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the diaphragm itself can be damaged and that material from the broken diaphragm and the fill fluid can contaminate the user's process fluids.

Be very careful with highly corrosive process fluids such as hydrochloric acid, sulfuric acid, hydrogen sulfide, sodium hypochlorite, and high-temperature steam (150°C [302°F] or above). Contact Yokogawa for detailed information of the wetted parts material.

- Forged version of the material may be used.
- Specify always with option code /K2 or /K6.


The "marks indicate the construction materials conform to NACE material recommendations per MR0175 (2003). Please refer to latest standards for details.



## II. Flange mounting section (Extended type)

• Process flange size: 4-inch (100mm)






Model	Suffix	codes				Description	on	
EJX210A					Transmitter body secti	on (I)		
Process co	nnection style -	E			Extended type			
Flange ratir	ng	1			JIS 10K			
					JIS 20K			
					ANSI class 150			
					ANSI class 300			
					JPI class 150			
					JPI class 300			
					DIN PN10/16			
					DIN PN25/40			
Flange size	•	4.			4-inch (100mm)			
Flange mat	terial		Α		JIS S25C			
			В		304 SST *5			
		(	C		316 SST *5			
Gasket con	tact surface*1		1		Serration (for ANSI fla	nge only)		
			2		Flat (no serration)	• • • •		
Wetted par	ts material				[Diaphragm]	[Others]	[Pipe]	1
(high press	ure side) *4		SE		316L SST#	316 SST#	316 S	ST#
Flushing co	onnection ring		0		None			
Extension			1		Length (X2) = 50mm			
			3	3	Length (X2) = 100mm			
			5		Length (X <sub>2</sub> ) = 150mm			
Fill fluid							[Process	[Ambient
							temperature]*2	temperature]
				-A	For high temperature i		-10 to 250°C*3	–10 to 85°C
			•	-B	For general use (Silico		–40 to 120°C	–40 to 85°C
				-D	For oil prohibited use (			–20 to 80°C
				-P	For sanitary use (Prop	ylene glycol)	–10 to 120°C	–10 to 85°C
Option code	es				/□ Optional specificat	tion		

The "▶" marks indicate the most typical selection for each specification.

Example: EJX210A-DMS5G-912NN-EA14B1SE01-B/□

- \*1: See Table 3 'Gasket contact surface' on Page 4.
- \*2: Indicates the process temperature limit of high pressure side.
  The process temperature limit for low pressure side is –40 to 120°C.
- \*3: The distance 'S' is extended in 30mm.
- \*4: \( \Delta \) Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the diaphragm itself can be damaged and that material from the broken diaphragm and the fill fluid can contaminate the user's process fluids.




Be very careful with highly corrosive process fluids such as hydrochloric acid, sulfuric acid, hydrogen sulfide, sodium hypochlorite, and high-temperature steam (150°C [302°F] or above). Contact Yokogawa for detailed information of the wetted parts material.


- \*5: Forged version of the material may be used.
- \*6: Specify always with option code /K2 or /K6.

The "marks" indicate the construction materials conform to NACE material recommendations per MR0175 (2003). Please refer to latest standards for details.

## II. Flange mounting section (Extended type)

• Process flange size: 3-inch (80mm)






Model	Suffix	codes				Description	on	
EJX210A					Transmitter body section	n (I)		
Process co	nnection style	-E			Extended type			
Flange ratir	· ·	J1 J2 A1 A2 P1 P2			JIS 10K JIS 20K ANSI class 150 ANSI class 300 JPI class 150 JPI class 300 DIN PN10/16 DIN PN25/40			
Flange size	<u> </u>				3-inch (80mm)			
Flange mat		► E	A		JIS S25C 304 SST*6 316 SST*6			
Gasket con	tact surface*1		1		Serration (for ANSI flang Flat (no serration)	ge only)		
Wetted par (high press					[Diaphragm] Hastelloy C-276 *4#	[Others] 316 SST#	[Pipe] 316 S	
Flushing co	onnection ring		0		None			
Extension			3		Length (X <sub>2</sub> ) = 50mm Length (X <sub>2</sub> ) = 100mm Length (X <sub>2</sub> ) = 150mm			
Fill fluid			<b>•</b>	-A -B -D -P	For high temperature us For general use (Silicon For oil prohibited use (F For sanitary use (Propyl	e oil) luorinated oil)* <sup>7</sup> lene glycol)	[Process temperature]*2 -10 to 250°C*3 -40 to 120°C -20 to 120°C -10 to 120°C	[Ambient temperature] -10 to 85°C -40 to 85°C -20 to 80°C -10 to 85°C
Option code	es				/□ Optional specificatio	n		

The " $\blacktriangleright$ " marks indicate the most typical selection for each specification.


Example: EJX210A-DMS5G-912NN-EA13B1WE01-B/□

- See Table 3 'Gasket contact surface' on Page 4.
- Indicates the process temperature limit of high pressure side.
- The process temperature limit for low pressure side is –40 to 120°C.
- \*3: The distance 'S' is extended in 30mm.
- Hastelloy C-276 or N10276
- \*5: A Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the diaphragm itself can be damaged and that material from the broken diaphragm and the fill fluid can contaminate the user's process fluids.



- Forged version of the material may be used.
- Specify always with option code /K2 or /K6.

The "marks indicate the construction materials conform to NACE material recommendations per MR0175 (2003). Please refer to latest standards for details.



## ■ OPTIONAL SPECIFICATIONS (For Explosion Protected type) "◇"

Item	Description	Code
Factory Mutual (FM)	FM Explosionproof Approval *1 Applicable Standard: FM3600, FM3615, FM3810, ANSI/NEMA 250 Explosionproof for Class I, Division 1, Groups B, C and D, Dust-ignitionproof for Class II/III, Division 1, Groups E, F and G, in Hazardous locations, indoors and outdoors (NEMA TYPE 4X) "FACTORY SEALED, CONDUIT SEAL NOT REQUIRED." Temperature class: T6, Amb. Temp.: -40 to 60°C (-40 to 140°F)	FF1
	FM Intrinsically safe Approval *1*2 Applicable Standard: FM3600, FM3610, FM3611, FM3810 Intrinsically Safe for Class I, Division 1, Groups A, B, C & D, Class II, Division 1, Groups E, F & G and Class III, Division 1, Class I, Zone 0, in Hazardous Locations, AEx ia IIC Nonincendive for Class I, Division 2, Groups A, B, C & D, Class II, Division. 2, Groups F & G, Class I, Zone 2, Group IIC, in Hazardous Locations Enclosure: "NEMA TYPE 4X", Temp. Class: T4, Amb. Temp.: –60 to 60°C (–75 to 140°F) Intrinsically Safe Apparatus Parameters [Groups A, B, C, D, E, F and G] Vmax=30 V, Imax=200 mA, Pmax=1 W, Ci=6 nF, Li=0 µH [Groups C, D, E, F and G] Vmax=30 V, Imax=225 mA, Pmax=1 W, Ci=6 nF, Li=0 µH	FS1
	Combined FF1 and FS1 *1*2	FU1
ATEX	ATEX Flameproof Approval *1  Applicable Standard: EN 60079-0:2009, EN 60079-1:2007, EN 60079-31:2009  Certificate: KEMA 07ATEX0109 X  II 2G, 2D Ex d IIC T6T4 Gb, Ex tb IIIC T85°C Db IP6X  Degree of protection: IP66/IP67  Amb. Temp. (Tamb) for gas-proof:  T4; -50 to 75°C (-58 to 167°F), T5; -50 to 80°C (-58 to 176°F), T6; -50 to 75°C (-58 to 167°F)  Max. process Temp. for gas-proof (Tp): T4; 120°C (248°F), T5; 100°C (212°F), T6; 85°C (185°F)  Max. surface Temp. for dust-proof: T85°C (Tamb: -30 to 75°C, Tp: 85°C) *3	KF22
	ATEX Intrinsically safe Approval *1*2  Applicable Standard: EN 60079-0:2009, EN 60079-11:2007, EN 60079-11:2012, EN 60079-26:2007, EN 61241-11:2006  Certificate: DEKRA 11ATEX0228 X  II 1G, 2D Ex ia IIC T4 Ga, Ex ia IIIC T85°C T100°C T120°C Db  Degree of protection: IP66/IP67  Amb. Temp. (Tamb) for EPL Ga: -50 to 60°C (-58 to 140°F)  Maximum Process Temp. (Tp) for EPL Ga:120°C  Electrical data: Ui=30 V, Ii=200 mA, Pi=0.9 W, Ci=27.6 nF, Li=0 μH  Amb. Temp. for EPL Db: -30 to 60°C *3  Max. surface Temp. for EPL Db: T85°C (Tp: 80°C), T100°C (Tp: 100°C), T120°C (Tp: 120°C)	KS21
	Combined KF22, KS21 and ATEX Intrinsically safe Ex ic *1*2  [ATEX Intrinsically safe Ex ic]  Applicable Standard: EN 60079-0:2009, EN 60079-0:2012, EN 60079-11:2012  II 3G Ex ic IIC T4 Gc, Amb. Temp.: –30 to 60°C (–22 to 140°F) *3  Ui=30 V, Ci=27.6 nF, Li=0 µH	KU22

Item	Description	Code
Canadian Standards Association (CSA)	CSA Explosionproof Approval *1 Certificate: 2014354 Applicable Standard: C22.2 No.0, C22.2 No.0.4, C22.2 No.0.5, C22.2 No.25, C22.2 No.30, C22.2 No.94, C22.2 No.60079-0, C22.2 No.60079-1, C22.2 No.61010-1 Explosion-proof for Class I, Groups B, C and D. Dustignition-proof for Class II/III, Groups E, F and G. When installed in Division 2, "SEAL NOT REQUIRED" Enclosure: NEMA TYPE 4X, Temp. Code: T6T4 Ex d IIC T6T4 Enclosure: IP66/IP67 Max.Process Temp.: T4;120°C(248°F), T5;100°C(212°F), T6; 85°C(185°F) Amb.Temp.: –50 to 75°C(–58 to 167°F) for T4, –50 to 80°C(–58 to 176°F) for T5, –50 to 75°C(–58 to 167°F) for T6 *3 Process Sealing Certification Dual Seal Certified by CSA to the requirement of ANSI/ISA 12.27.01 No additional sealing required Primary seal failure annunciation: at the zero adjustment screw	CF1
	CSA Intrinsically safe Approval *1*2 Certificate: 1606623 [For CSA C22.2] Applicable Standard: C22.2 No.0, C22.2 No.0.4, C22.2 No.25, C22.2 No.94, C22.2 No.157, C22.2 No.213, C22.2 No.61010-1, C22.2 No.60079-0 Intrinsically Safe for Class I, Division 1, Groups A, B, C & D, Class II, Division 1, Groups E, F & G, Class III, Division 1, Nonincendive for Class I, Division 2, Groups A, B, C & D, Class III, Division 2, Groups F & G, Class III, Division 1 Enclosure: NEMA TYPE 4X, Temp. Code: T4 Amb. Temp.: –50 to 60°C(–58 to 140°F) *3 Electrical Parameters: [Intrinsically Safe] Vmax=30V, Imax=200mA, Pmax=0.9W, Ci=10nF, Li=0 μH [Nonincendive] Vmax=30V, Ci=10nF, Li=0 μH [For CSA E60079] Applicable Standard: CAN/CSA E60079-11, CAN/CSA E60079-15, IEC 60529:2001 Ex ia IIC T4, Ex nL IIC T4 Enclosure: IP66/IP67 Amb. Temp.: –50 to 60°C(–58 to 140°F) *3, Max. Process Temp.: 120°C(248°F) Electrical Parameters: [Ex ia] Ui=30V, Ii=200mA, Pi=0.9W, Ci=10nF, Li=0 μH [Ex nL] Ui=30V, Ci=10nF, Li=0 μH  Process Sealing Certification Dual Seal Certified by CSA to the requirement of ANSI/ISA 12.27.01 No additional sealing required Primary seal failure annunciation: at the zero adjustment screw	CS1
	Combined CF1 and CS1 *1*2	CU1
IECEx Scheme	IECEx Flameproof Approval *1 Applicable Standard: IEC 60079-0:2004, IEC60079-1:2003 Certificate: IECEx CSA 07.0008 Flameproof for Zone 1, Ex d IIC T6T4 Enclosure: IP66/IP67 Max.Process Temp.: T4;120°C(248°F), T5;100°C(212°F), T6; 85°C(185°F) Amb.Temp.: –50 to 75°C(–58 to 167°F) for T4, –50 to 80°C(–58 to 176°F) for T5, –50 to 75°C(–58 to 167°F) for T6	SF2
	IECEx Intrinsically safe, type n and Flameproof Approval *1*2 Intrinsically safe and type n Applicable Standard: IEC 60079-0:2000, IEC 60079-11:1999, IEC 60079-15:2001 Certificate: IECEx CSA 05.0005 Ex ia IIC T4, Ex nL IIC T4 Enclosure: IP66/IP67 Amb. Temp.: –50 to 60°C(–58 to 140°F), Max. Process Temp.: 120°C(248°F) Electrical Parameters: [Ex ia] Ui=30V, Ii=200mA, Pi=0.9W, Ci=10nF, Li=0 μH [Ex nL] Ui=30V,Ci=10nF, Li=0 μH Flameproof Applicable Standard: IEC 60079-0:2004, IEC60079-1:2003 Certificate: IECEx CSA 07.0008 Flameproof for Zone 1, Ex d IIC T6T4 Enclosure: IP66/IP67 Max.Process Temp.: T4;120°C(248°F), T5;100°C(212°F), T6; 85°C(185°F) Amb.Temp.: –50 to 75°C(–58 to 167°F) for T4, –50 to 80°C(–58 to 176°F) for T5, –50 to 75°C(–58 to 167°F) for T6	SU2
	Combination of KU22, FU1 and CU1 *1*2	+

- \*1: \*2: \*3:
- Applicable for Electrical connection code 2, 4, 7, 9, C and D. Not applicable for option code /AL. Lower limit of ambient temperature is –15°C (5°F) when /HE is specified.

## ■ OPTIONAL SPECIFICATIONS

	Item		Des	cription		Code			
Painting	Color change	Amplifier cover only *1				P□			
		Amplifier cover and terminal cov	er, Munsell 7	.5 R4/14		PR			
	Coating change	Anti-corrosion coating *1*2				X2			
316 SST ext	erior parts	316 SST zero-adjustment screw	and setscrev	ws *3		HC			
Fluoro-rubbe	er O-ring	All O-rings of amplifier housing.	Lower limit of	ambient temp	perature: –15°C (5°F)	HE			
Lightning pro	otector	Transmitter power supply voltag Allowable current: Max. 6000 A Applicable Standards: IEC 6100	(1×40 µs), Re	peating 1000	30 V DC for intrinsically safe type.) A (1×40 µs) 100 times	Α			
Status outpu	it *4	Transistor output (sink type) Contact rating: 10.5 to 30 V DC, 120 mA DC(max ) Low level: 0 to 2 V DC							
Oil-prohibited	d use	Degrease cleansing treatment				K1			
		Degrease cleansing with fluoring Operating temperature –20 to 8		capsule. *16		K2			
Oil-prohibited		Degrease cleansing and dehydr	ating treatme	ent		K5			
dehydrating	treatment	Degrease cleansing and dehydr Operating temperature –20 to 8	rating treatme	ent with fluorin	ated oil filled capsule. *16	K6			
Calibration u	ınits *5	P calibration (psi unit)				D1			
		bar calibration (bar unit)		(See Table fo	or Span and Range Limits.)	D3			
		A calibration (kgf/cm² unit)							
Teflon film *6	Operation range: 20 to 150°C, 0 to 2 MPa (Not applicable for vacuum service).					TF1			
Output limits operation *8	and failure	Failure alarm down-scale: Outpoor less.	ut status at Cl	PU failure and	I hardware error is −5%, 3.2mA DC	C1			
		NAMUR NE43 Compliant Output signal limits:			: Output status at CPU r is −5%, 3.2 mA DC or less.	C2			
		3.8 mA to 20.5 mA			utput status at CPU r is 110%, 21.6 mA or more.	С3			
Gold-plated	diaphragm *9	Inside of isolating diaphragms (f permeation.	ill fluid side) a	are gold plated	I, effective for hydrogen	<b>A</b> 1			
Wired tag pla		316 SST tag plate wired onto transmitter							
Data configu	ration at factory*10	Data configuration for HART communication type  Software damping, Descriptor, Message							
		Data configuration for BRAIN communication type Software damping							
Advanced di	agnostics *14	Multi-sensing process monitoring • Impulse line blockage detection *15							
Material certificate	For Flush type	High Pressure side: Process flan Low Pressure side: Cover flange				MoW			
		High Pressure side: Process flan Low Pressure side: Cover flange				M1W			
		High Pressure side: Process flan Low Pressure side: Cover flange		ing *11 *13		M3W			
		High Pressure side: Process flat Low Pressure side: Cover flange	nge, Block, R	ing * <sup>12</sup> * <sup>13</sup>		M4W			
	For Extended type	High Pressure side: Process flat Low Pressure side: Cover flange	nge, Block, P			MOE			
31.		High Pressure side: Process flat Low Pressure side: Cover flange	nge, Block, Pi	ipe, Base *12 nnector		M1E			
Pressure tes		†	pressure]						
Leak test cer	rtificate *17*18		Pa (290 psi)			T51			
		JIS 20K 5 MF	Pa (720 psi)		]	T54			
			Pa (430 psi)		Nitrogen (N <sub>2</sub> ) Gas *20 Retention time: one minute	T52			
			Pa (1160 psi)	*6	Treating in the one minute	T56			
		ANSI/JPI Class 300 7 MF	Pa (1000 psi)	*19	]	T55			


- Not applicable for amplifier housing code 2 and 3.
- Not applicable with color change option.
- \*2: \*3: 316 or 316L SST. The specification is included in amplifier code 2.
- \*4: \*5: Check terminals cannot be used when this option is specified. Not applicable for output signal code F and G.
- The unit of MWP (Max. working pressure) on the name plate of a housing is the same unit as specified by option code D1, D3, and D4.
- \*6: Applicable for flush type (process connection style code W.)
- \*7: Applicable for flushing connection ring code 0.
- \*8: Applicable for output signal code D, E and J. The hardware error indicates faulty amplifier or capsule.
- Applicable for wetted parts material code SW, SE, WW, WE, and HW.
  - Consult Yokogawa in case gold-plated diaphragm is required for low pressure side.
- \*10: Also see 'Ordering Information.'
- Applicable for Low Pressure Side Process connection code 0 and 5. \*11:
- \*12: Applicable for Low Pressure Side Process connection code 1, 2, 3, and 4.
- \*13: Applicable for flushing connection ring code A, B, C, and D.
- \*14: Applicable only for output signal code E and J.
- \*15: The change of pressure fluctuation is monitored and then detects the impulse line blockage. See TI 01C25A31-01E for detailed technical information required for using this function.
- \*16: Applicable only when fill fluid code -D is specified.
- \*17: The unit on the certificate is always MPa regardless of selection of option code D1, D3, or D4.
- \*18: A flushing connection ring will not be applied when conducting the pressure test or leak test.
- \*19: Applicable for extended type (process connection style code E.)
- Pure nitrogen gas is used for oil-prohibited use (option code K1, K2, K5, and K6.)


## DIMENSIONS

#### Flush type


• No ring (Flushing connection ring code 0)


Unit: mm (approx.inch)

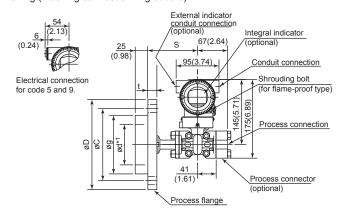



• With ring (Flushing connection ring code A, B, C, and D)

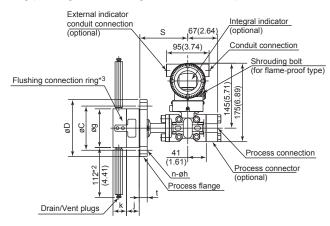




110(4.33)

Zero adjustmen

## Extended type

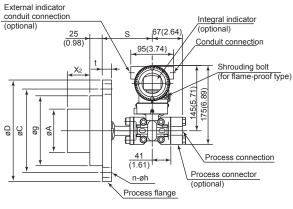


143(5.63)

		1.61) 1 Pro	Process connection cess connector tional)	54 (2.1		
		_	1	*3: Flushing connection ring		
	Fill fluid code	S		Straight type	Reducer type	
General use	B and P	113(4.45)		<b>/</b>		

High temperature use

Α

Add 11 mm (0.36 inch) for Drain/vent plugs of flushing connection ring.



F10E.ai

Ground terminal

<sup>\*1:</sup> Indicates inside diameter of gasket contact surface.
\*2: When option code K1, K2, K5, or K6 is selected, add 15 mm(0.59 inch) to the value in the flange.

Unit: mm (approx.inch)

## Process flange size: 4 inch (100 mm)

Code	Clange rating	«D	øС	~~	~4	4	Во	It holes		l,	øΑ	
Code	Flange rating	øD	ØC	øg	ød	ι	No.(n)	Dia.(øh)	J	k		
J1	JIS 10K	210 (8.27)	175 (6.89)	155 (6.10)	_	18 (0.71)	8	19 (0.75)		_	96±0.5 (3.78±0.02)	
J2	JIS 20K	225 (8.86)	185 (7.28)	155 (6.10)	_	24 (0.94)	8	23 (0.91)	_	_	96±0.5 (3.78±0.02)	
A1	ANSI class 150	228.6 (9.00)	190.5 (7.50)	155 (6.10)	_	23.9 (0.94)	8	19.1 (0.75)	_	_	96±0.5 (3.78±0.02)	
A2	ANSI class 300	254 (10.00)	200.2 (7.88)	155 (6.10)	_	31.8 (1.25)	8	22.4 (0.88)	_	_	96±0.5 (3.78±0.02)	
P1	JPI class 150	229 (9.02)	190.5 (7.50)	155 (6.10)	_	24 (0.94)	8	19 (0.75)	_	_	96±0.5 (3.78±0.02)	
P2	JPI class 300	254 (10.0)	200.2 (7.88)	155 (6.10)	_	32 (1.26)	8	22 (0.87)	_	_	96±0.5 (3.78±0.02)	
D2	DIN PN10/16	220 (8.66)	180 (7.09)	155 (6.10)	_	20 (0.79)	8	18 (0.71)	_		96±0.5 (3.78±0.02)	
D4	DIN PN25/40	235 (9.25)	190 (7.48)	155 (6.10)	_	24 (0.94)	8	22 (0.87)	_	_	96±0.5 (3.78±0.02)	

## Process flange size: 3 inch (80 mm)

Code	Flange rating	øD	øС	øg	ød*1	t		It holes	i	k	øΑ
	- ionigo ioning	~ -		~ 9		_	No.(n)	Dia.(øh)	,		
J1	JIS 10K	185 (7.28)	150 (5.91)	130 (5.12)	90 (3.54)	18 (0.71)	8	19 (0.75)	25 (0.98)	27 (1.06)	71±0.5 (2.8±0.02)
J2	JIS 20K	200 (7.87)	160 (6.30)	130 (5.12)	90 (3.54)	22 (0.87)	8	23 (0.91)	25 (0.98)	27 (1.06)	71±0.5 (2.8±0.02)
A1	ANSI class 150	190.5 (7.50)	152.4 (6.00)	130 (5.12)	90 (3.54)	23.9 (0.94)	4	19.1 (0.75)	25 (0.98)	27 (1.06)	71±0.5 (2.8±0.02)
A2	ANSI class 300	209.6 (8.25)	168.1 (6.62)	130 (5.12)	90 (3.54)	28.5 (1.12)	8	22.4 (0.88)	25 (0.98)	27 (1.06)	71±0.5 (2.8±0.02)
P1	JPI class 150	190 (7.48)	152.4 (6.00)	130 (5.12)	90 (3.54)	24 (0.94)	4	19 (0.75)	25 (0.98)	27 (1.06)	71±0.5 (2.8±0.02)
P2	JPI class 300	210 (8.27)	168.1 (6.62)	130 (5.12)	90 (3.54)	28.5 (1.12)	8	22 (0.87)	25 (0.98)	27 (1.06)	71±0.5 (2.8±0.02)
D2	DIN PN10/16	200 (7.87)	160 (6.30)	130 (5.12)	90 (3.54)	20 (0.79)	8	18 (0.71)	25 (0.98)	27 (1.06)	71±0.5 (2.8±0.02)
D4	DIN PN25/40	200 (7.87)	160 (6.30)	130 (5.12)	90 (3.54)	24 (0.94)	8	18 (0.71)	25 (0.98)	27 (1.06)	71±0.5 (2.8±0.02)

## Process flange size: 2 inch (50 mm)

Codo	Clange rating	~D	~C	~~	ød*1	4	Во	It holes		k
Code	Flange rating	øD	øС	øg	øu ·	ι	No.(n)	Dia.(øh)	J	K
J1	JIS 10K	155 (6.10)	120 (4.72)	100 (3.94)	61 (2.40)	16 (0.63)	4	19 (0.75)	25 (0.98)	27 (1.06)
J2	JIS 20K	155 (6.10)	120 (4.72)	100 (3.94)	61 (2.40)	18 (0.71)	8	19 (0.75)	25 (0.98)	27 (1.06)
A1	ANSI class 150	152.4 (6.00)	120.7 (4.75)	100 (3.94)	61 (2.40)	19.1 (0.75)	4	19.1 (0.75)	25 (0.98)	27 (1.06)
A2	ANSI class 300	165.1 (6.50)	127.0 (5.00)	100 (3.94)	61 (2.40)	22.4 (0.88)	8	19.1 (0.75)	25 (0.98)	27 (1.06)
P1	JPI class 150	152 (5.98)	120.6 (4.75)	100 (3.94)	61 (2.40)	19.5 (0.77)	4	19 (0.75)	25 (0.98)	27 (1.06)
P2	JPI class 300	165 (6.50)	127.0 (5.00)	100 (3.94)	61 (2.40)	22.5 (0.89)	8	19 (0.75)	25 (0.98)	27 (1.06)
D2	DIN PN10/16	165 (6.50)	125 (4.92)	100 (3.94)	61 (2.40)	18 (0.71)	4	18 (0.71)	25 (0.98)	27 (1.06)
D4	DIN PN25/40	165 (6.50)	125 (4.92)	100 (3.94)	61 (2.40)	20 (0.79)	4	18 (0.71)	25 (0.98)	27 (1.06)

## Process flange size: 1 1/2 inch (40 mm)


Code	Clange rating	~D	~C	~~	øg ød*1		ad*1 t		Bolt holes			le .
Code	Flange rating	øD	øС	øg	Øu '	ι	No.(n)	Dia.(øh)	J	k		
J1	JIS 10K	140 (5.51)	105 (4.13)	86 (3.39)	44 (1.73)	16 (0.63)	4	19 (0.75)	27 (1.06)	30 (1.18)		
J2	JIS 20K	140 (5.51)	105 (4.13)	86 (3.39)	44 (1.73)	18 (0.71)	4	19 (0.75)	27 (1.06)	30 (1.18)		
A1	ANSI class 150	127 (5.00)	98.4 (3.87)	86 (3.39)	44 (1.73)	17.5 (0.69)	4	15.9 (0.63)	27 (1.06)	30 (1.18)		
A2	ANSI class 300	155.4 (6.12)	114.3 (4.50)	86 (3.39)	44 (1.73)	20.6 (0.81)	4	22.4 (0.88)	27 (1.06)	30 (1.18)		
P1	JPI class 150	127 (5.00)	98.6 (3.88)	86 (3.39)	44 (1.73)	17.6 (0.69)	4	16 (0.63)	27 (1.06)	30 (1.18)		
P2	JPI class 300	155 (6.10)	114.3 (4.50)	86 (3.39)	44 (1.73)	20.6 (0.81)	4	22 (0.87)	27 (1.06)	30 (1.18)		

<sup>\*1:</sup> Indicates inside diameter of gasket contact surface.

## Extension length (X2)

Extension code	<b>X</b> 2
1	50 (1.97)
3	100 (3.94)
5	150 (5.91)

## • Terminal Configuration

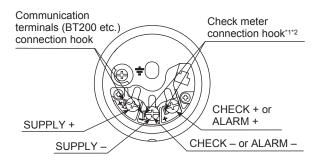


## • Terminal Wiring

SUPPLY	+	Power supply and output terminal
CHECK or ALARM	+ - +	External indicator (ammeter) terminal*1*2 or Status contact output terminal*2 (when /AL is specified)
<u></u>		Ground terminal

- \*1: When using an external indicator or check meter, the internal resistance must be  $10\Omega$  or less. A check meter or indicator cannot be connected when /AL option is specified.
- \*2: Not available for fieldbus and PROFIBUS communication types.
  F11E.ai

## • Wiring Example for Analog Output and Status Output

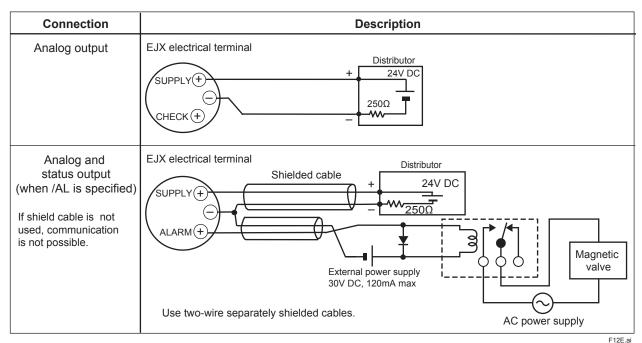

F12E.al

## < Ordering Information > "◊"

Specify the following when ordering

For output signal code **–J**, refer to GS 01C25T01-01EN.

- 1. Model, suffix codes, and option codes
- 2. Calibration range and units:
  - Calibration range can be specified with range value specifications up to 5 digits (excluding any decimal point) for low or high range limits within the range of -32000 to 32000. When reverse range is designated, specify LRV as greater than URV. When square root output mode is specified, LRV must be "0(zero)".
  - Specify only one unit from the table, 'Factory setting.'
- 3. Display scale and units (for transmitters equipped with the integral indicator only) Specify either 0 to 100 % or 'Range and Unit' for engineering units scale: Scale range can be specified with range limit specifications up to 5 digits (excluding any decimal point) for low or high range limits within the range of -32000 to 32000. Unit display consists of 6-digit, therefore, if the specified scaling unit excluding '/' is longer than 6-characters , the first 6 characters will be displayed on the unit display.
- 4. Tag Number (if required)
  For BRAIN communication type, specify upto 16 letters. The specified letters will be written in the amplifier memory and engraved on the tag plate. For HART communication type, specify software tag (upto 8 letters) to be written on the amplifier memory and Tag number(upto 16 letters) to be engraved on the tag plate seperately.
- Other factory configurations (if required)
   Specifying option code CA or CB will allow further configuration at factory. Following are configurable items and setting range.

[/CA: For HART communication type]

- 1) Descriptor (up to 16 characters)
- 2) Message (up to 30 characters)
- 3) Software damping (0.00 to 100.00 s)

I/CB: For BRAIN communication type1

1) Software damping (0.00 to 100.00 s)

### < Factory Setting >

Tag number	As specified in order
Software damping *1	'2.00 s' or as specified in order
Calibration range lower range value	As specified in order
Calibration range upper range value	As specified in order
Calibration range units	Selected from mmH <sub>2</sub> O, mmH <sub>2</sub> O(68°F), mmAq* <sup>2</sup> , mmWG* <sup>2</sup> , mmHg, Pa, hPa* <sup>2</sup> , kPa, MPa, mbar, bar, gf/cm <sup>2</sup> , kgf/cm <sup>2</sup> , inH <sub>2</sub> O, inH <sub>2</sub> O(68°F), inHg, ftH <sub>2</sub> O, ftH <sub>2</sub> O(68°F) or psi. (Only one unit can be specified.)
Display setting	Designated differential pressure value specified in order. (% or user scaled value.)
Static pressure display range	'0 to 25 MPa' for M and H capsule, absolute value. Measuring low pressure side.

- \*1: To specify these items at factory, option code /CA or /CB is required.
- \*2: Not available for HART protocol type.

#### < Material Cross Reference >

ASTM	JIS
316	SUS316
F316	SUSF316
316L	SUS316L
F316L	SUSF316L
304	SUS304
F304	SUSF304
660	SUH660
B7	SNB7
CF-8M	SCS14A